

TERMINATIONS CVD COAXIAL





General Specifications

Substrate: CVD Diamond
Resistive Material: Thin Film
Connector Body: SMA Passivated Stainless Steel
Housing: Nickel Plated Copper



Part Number	Impedance (Ohms)	Frequency (GHz)	Max VSWR	Temperature Range	Power (W)
RCX-SF30E	50	DC-27	1.30:1	-55° to +150°C	30

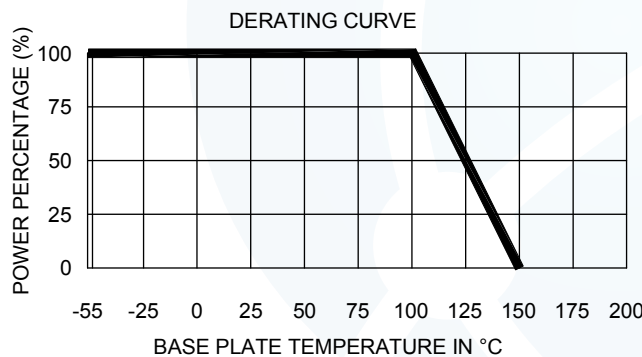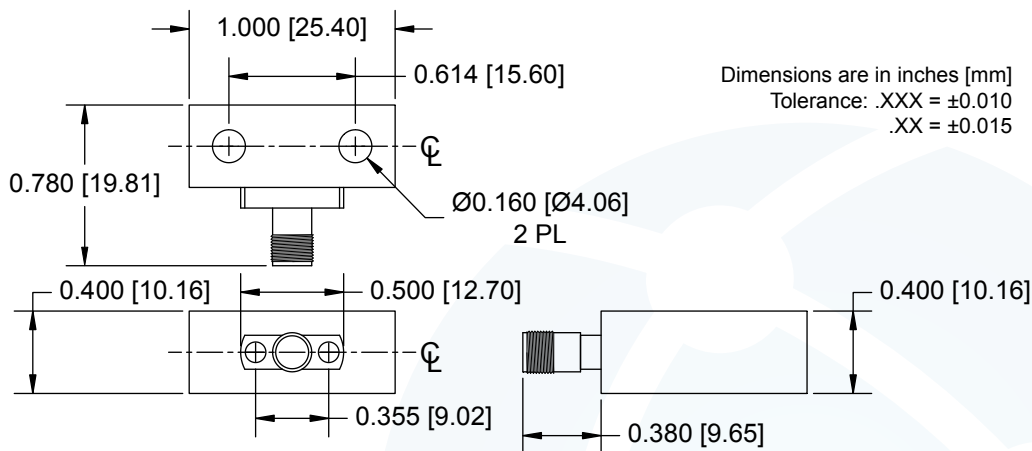

[Ordering Information on Page 87](#)

