

MIL-STD-1553 INTERFACE TRANSFORMERS QUALIFIED TO MIL-PRF-21038/27-02

- qualified for all QPL MIL-STD-1553 applications
- dual ratio in one package
- designed, constructed, and tested to meet MIL-PRF-21038 Level C
- standard package-no standoffs

APPLICABLE SPECIFICATIONS


- MIL-PRF-21038/27
- MIL-I-45208
- MIL-STD-202
- MIL-STD-1553B
- MIL-T-10727

SPECIFICATION REQUIREMENTS

Impedance.....	see chart
Droop.....	<20%
Overshoot.....	+/-1 volt maximum
Common mode rejection (CMR).....	>45 dB
Frequency range (no load).....	75 kHz-1 MHz
Operating temperature range.....	-55°C to +130°C
Weight.....	<5 grams
Insulation resistance (minimum).....	10 Kohms @ 250VDC
Dielectric withstanding voltage.....	100 ACVrms

Military Designation Number	Raycom Part No.	Height Max. Inches	Terminals	Ratio +/-3%	RDC ohms Max.	Impedance ohms Min.
M21038/27-02	HY1553QM-2	.250	1-3:4-8 1-3:5-7	1.4CT-1CT 2CT-1CT	(1-3) 3.5 (4-8) 3.0	(1-3) 7,200

SCHEMATIC AND DIMENSIONS

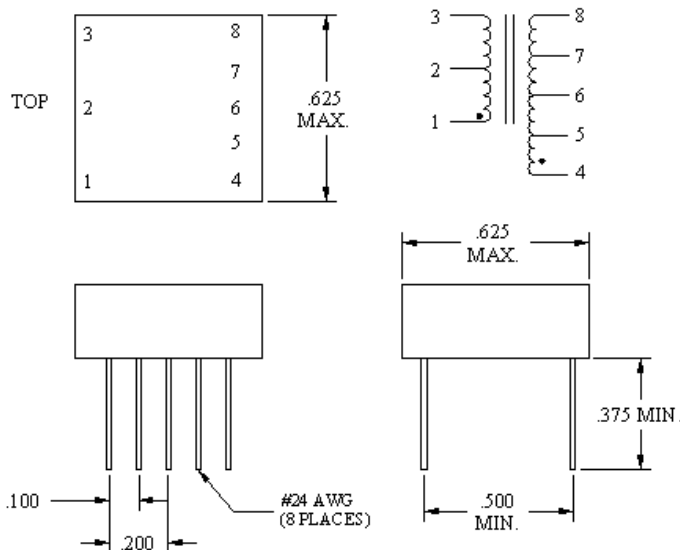

Raycom Electronics
1 Raycom Rd.,
P.O. Box 250, Dover, PA 17315
Tel: 717-292-3641
www.raycomelectronics.com